


BAGHDAD · IRAQ

A city-scale railway, designed as a verifiable system

Concept and front-end engineering design offer

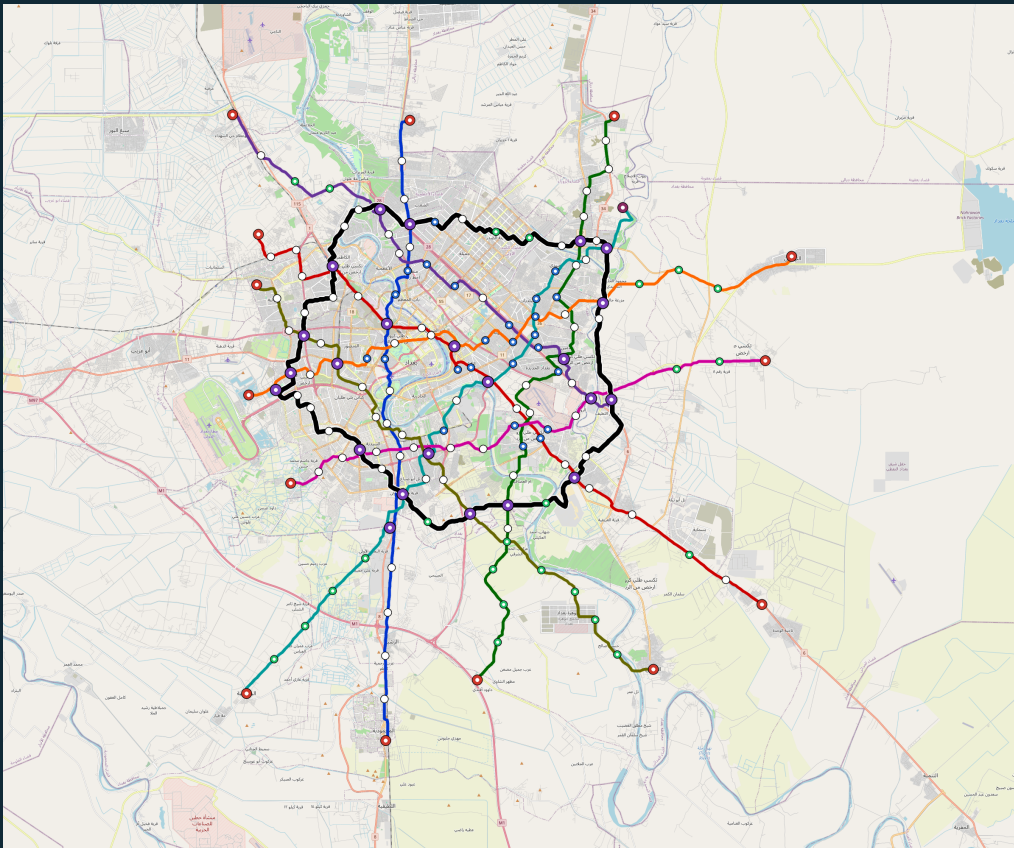

9 lines

182 stations

516.5 km

831 trainsets

Prepared from source-locked open geospatial data, a deterministic city design, native railway simulation, independent SUMO timetable validation and a city-specific project/operations twin.

STATUS · PLANNING BASELINE — NOT CONSTRUCTION RELEASE · 03 October 2026

EXECUTIVE SUMMARY

The proposition

OpenSourceRail offers Baghdad an owner-controlled way to move from city data to a buildable railway programme: route planning, topography and water screening, civil classification, fleet and energy sizing, timetable simulation, manufacturing/procurement planning, maintenance, ERP/HR workflows, SCADA boundaries and certification evidence all share one configuration baseline.

516.5 km double-track route	3 min peak headway	2.28 M practical trips/day	\$7.56 bn planning CAPEX
---	--	--	--

Decision requested: authorize a time-boxed owner-led data validation and FEED phase—not construction—then select one priority corridor and a surveyed depot/stabling solution.

What Baghdad receives

- A reproducible 9-line network baseline with 182 stations, 23 interchanges and open GIS layers.
- A complete planning twin linking 1,862 assets to budget, procurement, QA, maintenance and operating records.
- A six-car battery-electric fleet concept with candidate CRRC components under competitive procurement.
- Deterministic simulation and standards/FMEA evidence that reruns when controlled design inputs change.
- A staged assurance route that prevents a planning model from being misrepresented as regulatory approval.

What this document does not claim

It is not a bid from CRRC or any other manufacturer; not a demand forecast, land approval, utility agreement, geotechnical design, issued-for-construction package, safety certificate or financing commitment. Values remain planning screens until the named release gates close.



City-specific QGIS/GDAL package: 9 corridors, 182 stations, 23 interchanges and 2,312 classified civil segments.

PHYSICAL SYSTEM

Network, terrain and civil concept

428.3 km at grade	75.8 km elevated/viaduct	12.4 km bridge screen	19 junction upgrades
---	--	---	--

The automated designer combines OpenStreetMap transport/building/water/protected-area data with open SRTM elevation and derived slope. It rejects stations predominantly over mapped water and raises likely bridge, terrain viaduct, tight-radius and complex-junction segments for engineering review.

Civil class	Segments	Screened length	FEED closure
At grade	1112	428.3 km	Survey, land, utilities, drainage, crossings
Elevated / viaduct	1143	75.8 km	Vertical alignment, foundations, constructability, urban fit
Bridge	57	12.4 km	Hydrology/hydraulics, navigation, scour and authority approval

Station and operating layout

The plan includes 182 unique stations and 23 interchange complexes. Stations remain prohibited on mapped-water footprints in the automatic planner. Platform, access, evacuation, universal access, fire/life safety, utilities, traffic management and property interfaces require site-by-site G1 design evidence.

Depot and stabling status

OPEN GATE · The design allocates 831 trainsets operationally, but physical overnight positions, track-by-track capacity, workshop circulation, power/fire separation, security and morning/evening moves are not yet surveyed. The current \$8 M depot allowance is not reconciled and must not be treated as a final depot cost.

Proposed FEED action: compare at least three land-backed depot/distributed-stabling options, freeze an operator-owned fleet deployment plan, then update civil, energy, programme and cost baselines together.


OPERATING CONCEPT

Service, fleet and energy

05:30–02:00 operating day	751 peak revenue fleet	71 + 9 spare + cold reserve	3,952 one-way trips/day
---	--	---	---

The full native run covers 90,000 seconds and 216,126 train-km with zero invariant violations. Eight degraded cases—including aged batteries, maximum HVAC load, charging-contact loss, grid outage, missed charges and charger conflict—pass the present software model. SUMO independently records 36/36 planned validation services arriving.

Baghdad simulation trace: motion, dwell, charging, roof PV, and battery state

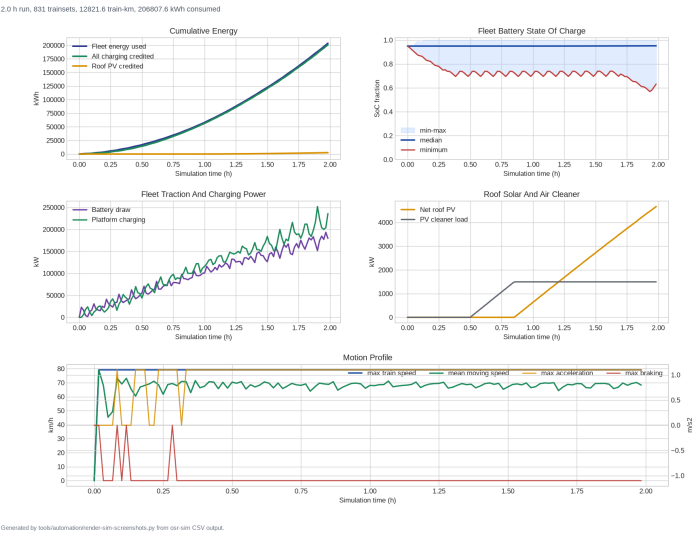

Native two-hour evidence trace; the full service-day-plus-run-out and degraded cases are retained as hashed JSON evidence.

Energy element	Planning baseline	Release boundary
Traction demand	2,053.8 GWh/year	Calibrated vehicle/duty data and operator timetable
Station/depot PV	52.1 MW	Surveyed roofs/sites, yield, structure, protection
Stationary storage	354 MWh	Supplier product, fire strategy, degradation and duty
Connected charging	316 MW	Grid/interface studies, selectivity and timetable conflicts
Dedicated solar	1,018.6 MW	Land, connection, PPA/ownership and measured resource

The model's zero residual grid/PPA import is a planning result. It is not proof of islanded operability or an approved grid connection; operating energy is explicitly marked unvalidated.

INDUSTRIAL SYSTEM

Rolling stock with a candidate CRRC parts package

The proposed fleet is 831 OpenSourceRail six-car battery-electric trainsets. The vehicle architecture, requirements, interfaces, FMEA, maintenance identities and acceptance gates remain owner-controlled. CRRC product families are included as candidate components because CRRC publicly lists traction and electrical control equipment and vehicle components—not because a supplier has been appointed.

Candidate package	Potential CRRC scope	Required acceptance evidence
Traction	PMSM motors; SiC/traction converters; auxiliary converters	Duty-cycle sizing, efficiency map, thermal/EMC, HIL and first article
Running gear	Bogies, air springs, dampers and associated components	Gauge/axle load, dynamics, fatigue, climate/dust and maintainability
Interfaces	Couplers/draft gear, brake equipment, train-network controls	ICDs, braking case, cybersecurity, diagnostics, rescue and interoperability
Passenger systems	Passenger-information and equipment interfaces	Accessibility, language/content, EMC, fire, software and fleet configuration

Procurement and localisation controls

- Issue performance-based RFQs and accept multiple compliant examples; do not lock the design to an unqualified catalogue part.
- Freeze actual manufacturer, model, firmware, drawings, material declarations, test reports, warranties, spares and obsolescence plan at G2.
- Qualify local assembly, inspection, tooling, calibration, training and technology-transfer outcomes contractually—not by supplier nationality claims.
- Keep batteries, cooling/HVAC, traction, braking, bogies, doors, train control and rescue interfaces in one system integration baseline.

Supplier statement · No CRRC partnership, endorsement, quotation, selected product or configuration approval exists in this package. All sourcing is subject to competition, technical qualification, licensing, contract and authority acceptance.

Primary public sources


CRRC components overview · vehicle components · electric-control equipment · CRRC Dalian traction/control

PROJECT, ERP, SCADA AND MAINTENANCE

One digital operating and delivery system

1,862 controlled assets	8,012 manufacturing tasks	15,804 material/BOM rows	10,785 maintenance tasks
---	---	--	--

The Baghdad project twin connects engineering configuration to schedule, cash requirements, procurement candidates, QA gates, manufacturing verification, asset registers and preventive maintenance. ERPNext/Frappe remains the business-system boundary; supervision/SCADA observations are isolated from movement authority and protection functions.

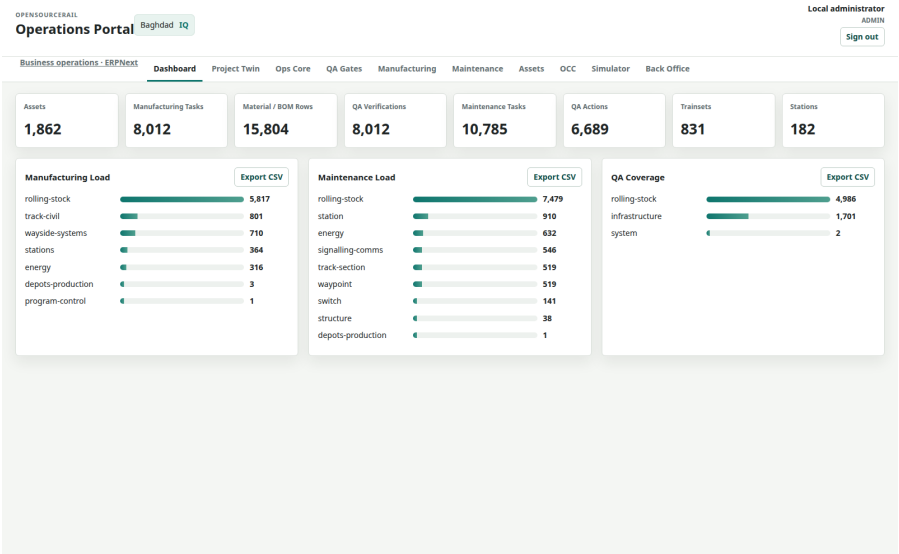

Live Baghdad operations dataset rendered by the OpenSourceRail portal; screenshot captured from the local controlled bundle.


AI-supported management—with human authority

A multi-model advisory council may draft reversible management actions and compare independent model ballots. Quorum, model diversity, dissent, evidence hashes and an operator attestation are recorded. The council cannot command trains or SCADA, override ATP/interlocking or braking, authorize safety release, hire/dismiss staff, commit money, sign contracts, approve payments or exercise legal authority.

The management model is decision support, not an artificial legal officer. Named competent people remain accountable for every approval and operational authority.

CERTIFICATION AND AUTHORIZATION

Assurance built into every change

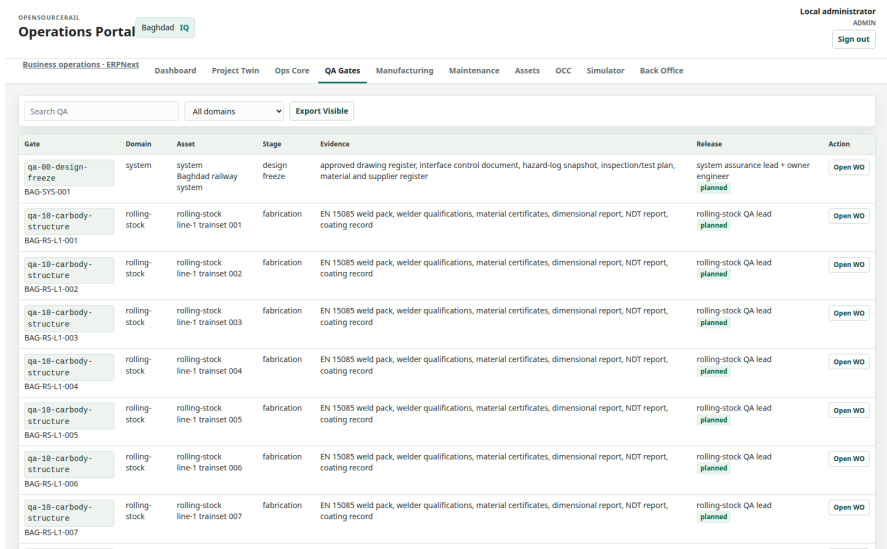

Baghdad QA-gate view: planned evidence is configuration-linked; a planned row is not an approval.

Gate	Purpose	Minimum decision evidence	Authority
G0 · baseline	Identity and provenance	Version, source, applicability, checksum and owner	Configuration control
G1 · design	Design assurance	Requirements, standards, hazards/FMEA, calculations and interfaces	Owner engineer / discipline leads
G2 · qualify	Actual implementation	Supplier/product configuration, type/first-article tests and NCR closure	QA + engineering + supplier
G3 · integrate	Installed system	FAT/SAT, site/vehicle integration, degraded operation and training	Operator / integrator / assessor
G4 · authorize	Independent/legal acceptance	Independent assessment and competent authority decisions	Named legal authorities

Current evidence position

The GIS package, cost/finance generator, native simulation including eight degraded cases, SUMO timetable validation and operations bundle pass their deterministic planning checks and have current hashes. The overall city package remains incomplete by design because two physical summaries—depot scope and stabling—have not passed release readiness.


No simulation eliminates required physical testing. The digital twin reduces redesign risk by screening standards, interfaces and failure modes before fabrication, then binds physical evidence back to the exact configuration.

PROGRAMME AND FUNDING

Commercial planning and delivery route

\$7.56 bn base planning total	\$8.69 bn +15% envelope	\$9.44 bn +25% envelope	77.1% modelled local capital
---	---	---	--

Planning bucket	Value	Critical qualification
Civil works	\$3.89 bn	Survey/land/utilities/geotechnical and detailed structures
Stations	\$908 M	Site fit, passenger/fire/accessibility and MEP design
Rolling stock	\$1.40 bn	Competitive supplier offer, qualification and support
Solar plant	\$815 M	Land, grid, measured resource and commercial structure
Depots	\$8 M	Not reconciled; replace after depot/stabling FEED
Other systems / EPC	\$534 M	Control, charging, project services and integration

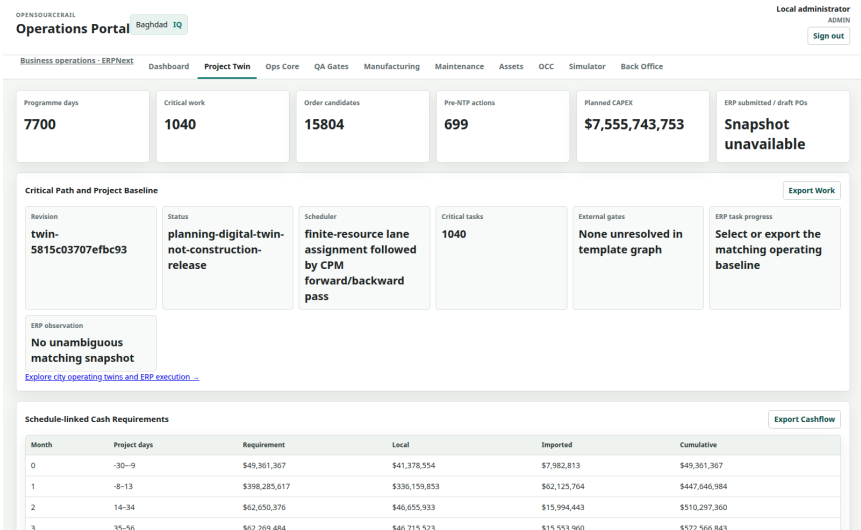


Baghdad project twin: 7,700 planning days, 1,040 critical work packages and 699 pre-NTP actions. Its status is explicitly “planning-digital-twin-not-construction-release”.

The foreign-turnkey and localisation figures are sensitivities, not received bids. Land, taxes/duties, utility relocation, escalation and unresolved depot scope must be owner-defined before affordability decisions. Financing fees are separately modelled in the Iraq cashflow.

STRUCTURED FINANCING APPRAISAL

Iraq sources, repayments and public cash

Capital source	Proposed USD equivalent
bank credit	\$687 M
chinese export credit	\$682 M
domestic bonds	\$2.06 bn
government	\$4.12 bn

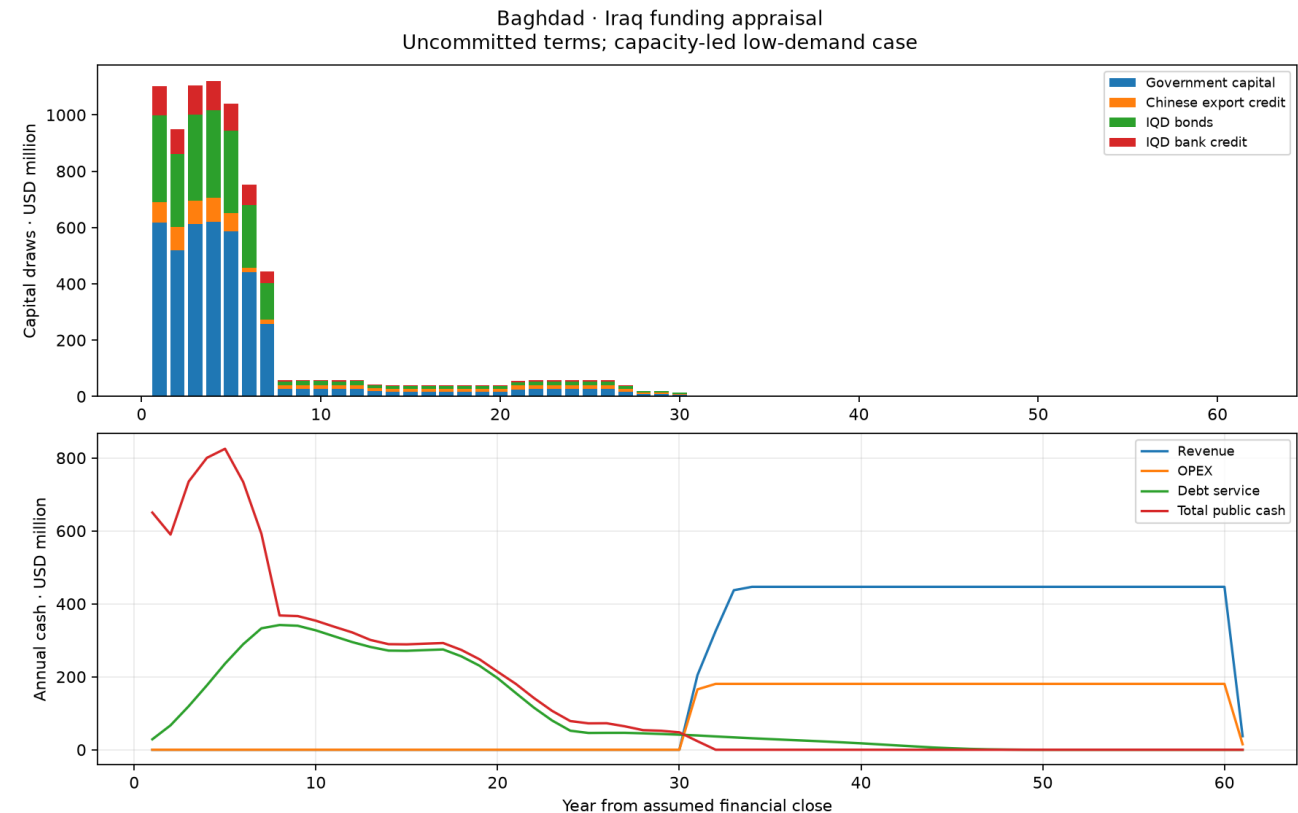

Construction cash spans 361 assumed calendar months under the current constrained CPM. Peak annual public cash is \$825 M; loan repayment is tied to draw dates, not postponed until opening.

Chinese export buyer credit is proposed only for eligible Chinese PV, bogie, battery, window and door invoices. Government contributes capital and invoice downpayments; proposed IQD sovereign bonds and term bank credit fund the remainder. Tooling is allocated once to a shared national plant outside city CAPEX. Loan advance, rates, maturities and origination fees are uncommitted assumptions, not bank offers.

Monthly ledgers separately show native-currency draws, principal, interest, fees, fare/nonfare receipts, OPEX, public support and restricted reserves. FX, demand, delay, short-bullet bonds, withheld appropriations and declined Chinese credit are stressed. Subsidy does not increase pre-support DSCR; no automatic refinancing or unlimited bridge credit is assumed.

PROPOSED ENGAGEMENT

A controlled path from model to railway

Phase	Indicative purpose	Exit decision
0 · Validate	12–16 weeks: authority map, data room, demand/operations calibration, survey procurement, priority corridor and depot longlist	Owner accepts requirements, evidence gaps and FEED scope
1 · FEED	Surveyed alignment, utilities/property, geotechnical/hydraulic work, depot/stabling options, system requirements, RAMS and cost/risk baseline	G1 design baseline and independently reviewed business case
2 · Procure/pilot	Competitive component/works packages; supplier qualification; HIL/FAT; one priority corridor, depot and operating organisation	G2/G3 evidence and restricted trial authority
3 · Authorize/scale	Independent assessment, trial operation, competence, emergency readiness, legal approvals and measured performance	G4 passenger service authority, then controlled rollout

Immediate owner decisions

- Name the legal project owner, transport operator interface, infrastructure authority, safety/regulatory route and independent assessor.
- Authorize a controlled data room and field-data plan; confirm Arabic/English document and operational requirements.
- Select the passenger-demand method, target fares/service policy and a representative priority corridor.
- Protect land for at least three depot/stabling alternatives before choosing a physical configuration.
- Approve performance-based market engagement for rolling stock components, energy, civil works and system integration.

External gates before any construction release

Surveyed alignment, property and utilities · calibrated demand and operator timetable · geotechnical, drainage, structural and fire acceptance · supplier-frozen battery, charger, traction and mechanical equipment · independently assessed safety case and competent legal authorization.

Evidence and reproducibility

The offer PDF, design, GeoPackage, simulations, operations bundle and screenshots are retained in the Baghdad city package. ``offer/manifest.json`` records SHA-256 hashes for the PDF and its controlled inputs. Regenerate the city with ``./osr city baghdad``, capture the portal with ``node tools/automation/capture-city-offer.mjs``, and rebuild this document with ``python3 tools/automation/build-baghdad-offer.py``.

OpenSourceRail · open engineering baseline · owner-controlled evidence · fail-closed release claims